

# Elegance Rigid 55

## Fiche technique

Classification	Norme	
Classe d'usage résidentielle	EN ISO 10874	23 Intense
Classe d'usage commerciale	EN ISO 10874	33 Intense
Caractéristiques	Norme	
Épaisseur totale	NF EN ISO 24346	5,50 mm
Épaisseur de la couche d'usure	NF EN ISO 24340	0,55 mm
Masse surfacique totale	NF EN ISO 23997	8800 g/m <sup>2</sup>
Teneur en agent liant		Type I
Traitement de surface		Extra-Mat
Grainage au registre		Oui (sur une sélection de décors)
Chanfreins		4 sides
Performances pour le Marquage CE	Norme	
Réaction au feu	NF EN ISO 24346	Bfl-s1
Glissance (coef.)	NF EN 13893	Classe DS ( $\mu \geq 0,30$ )
Résistance thermique	NF EN ISO 10456	0,05 m <sup>2</sup> •K/W
Performances Techniques	Norme	
Stabilité dimensionnelle	NF EN ISO 23999	Valeur moyenne mesurée : $\leq 0.15 \%$
Incurvation après exposition à la chaleur	NF EN ISO 23999	$\leq  1 $ mm
Poinçonnement rémanent	NF EN ISO 24343-1	LE010
Efficacité acoustique au bruit de choc - $\Delta L_w$	NF EN ISO 717-2	19 dB
Sonorité à la marche	NF 531-074	Classe C ( $\leq 85$ dB)
Solidité des coloris à la lumière	NF EN ISO 105-B02	$\geq 6$
Résistance chimique	NF EN ISO 26987	Bonne résistance
Compatible avec chauffage au sol		Compatible (température maximale de surface 27°C)
Développement Durable, Environnement et Qualité de l'Air	Norme	
Emissions COVT après 28 jours	NF ISO 16000-9	Platinum ( $\leq 10 \mu\text{g}/\text{m}^3$ )
Contenu recyclé		20 %
Sans phtalate		100% sans phtalate
Dimensions et décors		
Lame	Lames 1200 x 200,5 - 9 lames = 2,165 m <sup>2</sup> /boîte - 44 boîtes/palette	
Dalle	Dalles 640 x 320mm - 11 Dalles = 2,253 m <sup>2</sup> /boîte - 40 boîtes/palette	
Nombre de décors disponibles	20	



Les informations ci-dessus peuvent faire l'objet de modifications au profit d'une amélioration complémentaire (05/06/2023). Conformément au Règlement Européen N° 305/2011 pour le Marquage CE, les Déclarations de Performance sont disponibles sur notre site <https://www.tarkett.com>. Les recommandations de Tarkett concernant la mise en œuvre, le nettoyage et l'entretien doivent être respectées. Veuillez contacter Tarkett à l'adresse indiquée pour les recommandations.

# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

## Elegance Rigid and Essence Rigid 30/55 from TARKETT



Programme:	The International EPD® System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
EPD registration number:	S-P-05601
Publication date:	2023-05-24
Valid until:	2028-05-24

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*



## General information

### Programme information

<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product category rules (PCR): PCR 2019:14 version 1.11 and c-PCR-004 Resilient textile and laminate floor coverings (EN 16810)
PCR review was conducted by: <i>The Technical Committee of the International EPD® System lead by Claudia A Peña. A full list of members available on <a href="http://www.environdec.com">www.environdec.com</a>. The review panel may be contacted via <a href="mailto:info@environdec.com">info@environdec.com</a>.</i>
Independent third-party verification of the declaration and data, according to ISO 14025:2006: <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification
Third party verifier: Olivia Djiriguian from LCIE Bureau Veritas.
Procedure for follow-up of data during EPD validity involves third party verifier: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

This EPD is a specific EPD.

## Company information

Owner of the EPD: Tarkett

Contact: Marcelo Martins Meira, [marcelo.martinsmeira@tarkett.com](mailto:marcelo.martinsmeira@tarkett.com), Tarkett La Défense, 1 Terrasse Bellini 92400 Paris

Description of the organisation:

With an international coverage and a wide range of products, Tarkett has over 130 years of experience in providing integrated solutions for floorings to professionals and end users.

Many of the most important architectural firms in the world and building professionals have chosen Tarkett for the value of its products and for its consultation and service abilities. Therefore, Tarkett floorings and sport surfaces are present in several prestigious architectural reference points. Tarkett offers integrated solutions for floorings, able to meet the particular needs of customers. Our wide range of designs, colors and models provides an infinite series of possibilities, contributing to create a positive environment and a better quality of life for people.

Tarkett operates with the utmost respect for the environment towards the realization of eco-friendly products.

Tarkett's commitment to the environment is woven throughout its business. Cradle-to-Cradle principles are, in fact, the basis of the design and production of every solution. Particularly, the lifecycle analysis is used to continuously improve the production process, and so the products until their use stage, disposal and recycling. The commitment to the environment is also proven by the accession to the Circular Economy 100 program, where Tarkett group, with a network of companies, is working to develop a circular economy model based on the reuse of materials and preservation of natural resources. The development of products that can be reused within internal production cycles, or external ones in case of other individuals, has been an integral part of the business strategy aimed at sustainability for many years. The WCM (World Class Manufacturing) management system has been developed in 2009, and it includes the environmental pillar aimed to the elimination of losses and to the growth of process efficiency.

Product-related or management system-related certifications: ISO 9001, ISO 14001, ISO 50001, WCM manufacturing site.

Name and location of production site(s): Jaslo, Poland

## Product information

Product name: Elegance Rigid 55, Essence Rigid 30, Essence Rigid 55.

Product identification: Heterogeneous poly (vinyl chloride) floor coverings (EN 10582).

Product description: Elegance and Essence Rigid 30/55 are a modular heterogeneous compact resilient floor covering developed by Tarkett. The service lifetime recommended by Tarkett is 25 years.

Geography: European technology and process coverage.

UN CPC code: APE/NAF - 2223Z

## LCA information

Functional unit / declared unit: 1m<sup>2</sup> of floor covering with a reference service life (RSL) of 1 year for specified characteristics application and use areas according to ISO 10582 and EN ISO 10874.

Reference service life: 25 years

Time representativeness: 2022.

Database(s) and LCA software used: Ecoinvent3.8, Simapro 9.1


Description of system boundaries: Cradle to grave and module D (A + B + C + D)

Cut-off criteria : The cut-off criteria used for this study follow the guidelines set out in the PCR which conform to the EN 15804-A2, as following:

- All inputs and outputs to a (unit) process are included in the calculation where the data is available.
- A maximum of 1% of the total mass per unit process may be omitted.
- A maximum of 1% of the total renewable and non-renewable energy for a unit process may be omitted.
- A maximum of 5% of the total energy usage and mass per module may be omitted.

All input and output flows have been considered, including raw materials as per the product composition provided by the manufacturer and packaging of raw materials as well as the final product. Energy and water consumptions have also been considered at 100% according to the data provided.

System diagram:

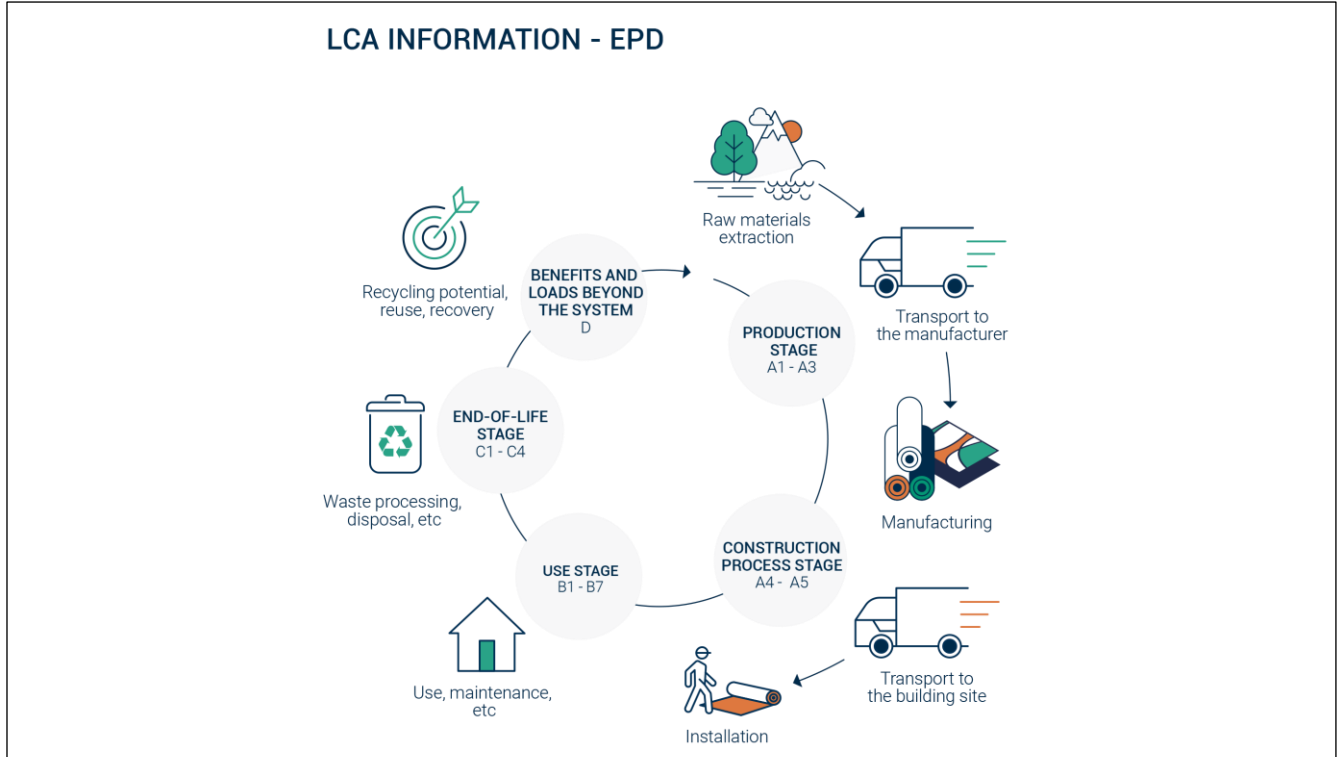

More information: The product is classified in accordance with EN ISO 10874, EN 685 and in reference to the FCSS (Floor Covering Standard Symbols) to be installed in various areas of application, such as: healthcare, education, commercial, education. The area of use according to the ISO 10874 is heavy (23) for domestic use, heavy (33) for commercial classification and heavy (42) for industrial classification.

Product	Domestic Classification	Commercial Classification	Industrial Classification
Elegance Rigid 30/55	23 Heavy domestic use	33 Heavy commercial use	42* Heavy Industrial
Essence Rigid 30/55	23 Heavy domestic use	33 Heavy commercial use	42* Heavy Industrial

\* on demand (without acoustic integrated underlayer)

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Product stage		Construction process stage			Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	European technology and process coverage																European	
Specific data used	-	100%	100%	100%	100%	-	-	-	-	-	-	-	-	-	-	100% For recycling process	100% For recycling process	
Variation – products	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation – sites	-	-	-	European average for Tarkett		-	-	-	-	-	-	-	-	-	-	-	-	

## Content information

The components for Elegance Rigid and Essence Rigid 30/55 are detailed here:

Elegance Rigid and Essence Rigid 30/55			
Product components	Weight, kg/m <sup>2</sup>	Post-consumer material, weight-%	Renewable material, weight-%
PVC Suspension	2.59E+00	0%	0%
Plasticizers	1.60E-01	0%	0%
Epoxidised soya bean oil	3.00E-02	0%	83%
Mineral fillers	5.72E+00	0%	0%
Stabilizer CaZn	2.20E-01	0%	0%
Titanium dioxide	1.00E-02	0%	0%
Pigments	6.00E-02	0%	0%
Surface Treatment	2.00E-02	0%	0%
Impact modifiers	1.00E-02	0%	0%
Additives	3.00E-02	0%	0%
Foam	5.90E-02	0%	0%
TOTAL	8.8E+00	0%	0.26%
Packaging materials	Weight, kg/m <sup>2</sup>	Weight-% (versus the product)	
Product Packaging Cardboard	3.00E-02	0.3%	
TOTAL	3.00E-02	0.3%	



## Product manufacturing

### Production process

The production of the heterogenous resilient flooring is divided into the following stages:

Extrusion: continuous mixing and heating process where raw materials are fused and, optionally, shaped through a die, suitable for making shapes such as rods (welding rods), granules or thick sheets (Rigid LVT core layer).

Calendering: continuous shaping process of thermoplastic material which allows the making of thin sheets or films (thickness < 1 mm). The calender is fed through an extruder.

Pressing: semi-continuous process which allows the lamination of several layers priorly produced by extrusion and/or calendaring.

Profiling: semi-continuous process where a connection system is machined on the material edges.

Pad attaching: semi-continuous process where an acoustic backing is bonded on the back side of the product.

Packaging: semi-continuous process where the finished product is either wrapped around a cardboard core, packed in plastic film and protected with plastic side plates on the edges (rolls) OR stacked head-to-toe and packed into cardboard boxes (planks or tiles).

### Production waste

Waste type	Amount	Unit
Non-hazardous waste to external treatment	1.00E-01	kg/m <sup>2</sup>
Non-hazardous waste-water to external treatment	2.00E-02	kg/m <sup>2</sup>

NB: Post manufacturing recycling concerns the recycling of the losses inside the plant production. Therefore, there is no end-of-life impact on losses (except the recycling preparation). Post-manufacturing recycled content is 20 - 30%.

### Health, safety and environmental aspects during production

Elegance Rigid and Essence Rigid 30/55 production site complies with the ISO 14001 Environmental Management System and the ISO 9001 Quality Management System.

## **Delivery and installation**

### **Delivery**

The average distribution distance between the factory and the installation site is 2160 km. It has been calculated considering the average distance between European countries where Tarkett is selling the Elegance Rigid and Elegance Rigid 30/55 products and the factory plant in Jaslo (Poland). The distribution is made by truck.

### **Installation**

The slabs of Elegance Rigid and Essence Rigid 30/55 are clickable and therefore require no auxiliaries for installation.

### **Waste**

During the installation approximately 3% of the flooring is lost as off-cuts. All flooring losses are sent to recycling.

### **Packaging**

50 % of the packaging materials goes to incineration and 50 % goes to landfill.

## Use Stage

### Reference Service Life (RSL)

For this product, the stated RSL is 1 year. It should be noted, however, that the service life of a Heterogenous polyvinylchloride floor covering may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with that defined by ISO 14041 and ISO10874 in accordance with the product's classification. **The service lifetime recommended by Tarkett is 25 years.**

### Cleaning and maintenance

Cleaning regime is based on traditional cleaning protocol integrating manual and mechanical operations. Depending on premises considered, these consumptions may vary. The considered regime fits light commercial areas. The maintenance scenario is :

- **Common maintenance : 4 times a week**
- **Periodic maintenance : once a week**

Description	Amount	Unit
Electricity consumption	2.89E-01	kWh/year/m <sup>2</sup>
Water consumption	7.06E+00	L/year/m <sup>2</sup>
Detergent consumption	6.88E-02	L/year/m <sup>2</sup>

### Prevention of structural damage

To avoid excessive wear, usage should be restricted to the stated areas of application as outlined by the norm ISO 10874.

## End of Life

3 distinct End-of-Life scenarios have been modeled for Elegance and Essence Rigid 30/55. Tarkett recommend using the ReStart program at End-of-Use to recycle the product. However, to showcase the value of Tarkett's recycling activities, environmental impacts of two alternative scenarios have been calculated.

### 1/ Recycling.

100% of the Elegance and Essence Rigid 30/55 can be recycled at its end of use stage, thanks to the ReStart® program, enabling Tarkett to collect installation losses and post-use flooring from construction sites to recycle it and/or re-use it as high quality raw material back in Tarkett plants. Thus, Elegance and Essence Rigid 30/55 are recycled back at the Jaslo plant, and the transport between construction site and recycling facility is 1354 km by truck. Environmental impacts of recycling are presented in module **C/1**.

### 2/ Incineration with energy recovery

Incineration with energy recovery is a rising waste management method in many of the countries in which Elegance and Essence Rigid 30/55 are sold. While Tarkett wishes to recycle 100% of sold Elegance Rigid 30/55. Incineration with energy recovery is an alternative option if recycling is impossible. Environmental impacts of incineration with energy recovery are presented in module **C/2**.

### 3/ Landfilling

Landfilling waste is still a prominent waste management scenario. This option is however not recommended by Tarkett. Environmental impacts of landfilling are presented in module **C/3**.

## Benefits and loads beyond system boundary

### 1/ Recycling.

The benefit is due to the recycling post-use flooring that allows avoiding the emissions of virgin materials. Elegance and Essence Rigid 30/55 can be 100% recycled at post-installation and post-consumer stage. Benefits from avoided raw material production and avoided transport are calculated in module **D/1**.

### 2/ Incineration with energy recovery

Benefits from installation offcuts recycling and incineration energy recovery are calculated in **D/2**.

### 3/ Landfilling

Benefits accounted in this scenario exclusively come from installation offcuts recycling and are presented in **D/3**

# Results

## Environmental Information

### Potential environmental impact in case of recycling at End-of-use

Results per functional unit in case of recycling – Elegance and Essence Rigid 30/55																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
GWP-total	kg CO <sub>2</sub> eq.	9,63E+00	3,15E+00	5,51E-01	0,00E+00	2,54E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,73E+00	0,00E+00	7,00E-02	-7,29E+00
GWP-fossil	kg CO <sub>2</sub> eq.	9,50E+00	3,15E+00	4,91E-01	0,00E+00	2,47E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,73E+00	0,00E+00	0,00E+00	-7,13E+00
GWP- biogenic	kg CO <sub>2</sub> eq.	-3,19E-02	1,27E-03	5,53E-02	0,00E+00	1,42E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,91E-04	0,00E+00	7,00E-02	-1,63E-02
GWP- Luluc	kg CO <sub>2</sub> eq.	1,57E-01	1,24E-03	4,81E-03	0,00E+00	5,73E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,79E-04	0,00E+00	0,00E+00	-1,44E-01
ODP	kg CFC 11 eq.	3,50E-06	7,31E-07	1,50E-07	0,00E+00	1,58E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,00E-07	0,00E+00	0,00E+00	-3,06E-06
AP	mol H <sup>+</sup> eq.	4,31E-02	1,27E-02	2,14E-03	0,00E+00	1,44E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,02E-03	0,00E+00	0,00E+00	-3,32E-02
EP-freshwater	kg P eq	2,93E-03	2,04E-04	1,14E-04	0,00E+00	2,00E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,11E-04	0,00E+00	0,00E+00	-2,37E-03
EP-freshwater	kg PO4 eq	8,99E-03	6,26E-04	3,49E-04	0,00E+00	6,15E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,42E-04	0,00E+00	0,00E+00	-7,26E-03
EP-marine	kg N eq.	8,89E-03	3,78E-03	5,62E-04	0,00E+00	4,06E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,12E-03	0,00E+00	0,00E+00	-6,80E-03
EP-terrestrial	mol N eq.	8,99E-02	4,13E-02	5,35E-03	0,00E+00	2,65E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,31E-02	0,00E+00	0,00E+00	-6,40E-02
POCP	kg NMVOC eq.	2,98E-02	1,27E-02	1,72E-03	0,00E+00	6,66E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,08E-03	0,00E+00	0,00E+00	-2,31E-02
ADP- minerals&metals*	kg Sb eq.	2,10E-04	1,10E-05	6,99E-06	0,00E+00	1,37E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,02E-06	0,00E+00	0,00E+00	-1,90E-04
ADP-fossil*	MJ	2,07E+02	4,78E+01	9,39E+00	0,00E+00	5,26E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,62E+01	0,00E+00	0,00E+00	-1,69E+02
WDP	m <sup>3</sup>	1,07E+01	1,39E-01	3,33E-01	0,00E+00	1,35E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,58E-02	0,00E+00	0,00E+00	-9,62E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP- minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption															

## Environmental Information

### Resource use in case of recycling at End-of-use

Results per functional unit in case of recycling – Elegance and Essence Rigid 30/55

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
PERE	MJ	3,95E+01	6,75E-01	1,27E+00	0,00E+00	1,08E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,69E-01	0,00E+00	0,00E+00	-9,21E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,90E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	3,95E+01	6,75E-01	1,27E+00	0,00E+00	1,08E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,69E-01	0,00E+00	0,00E+00	-9,21E+00
PENRE	MJ	2,06E+02	4,78E+01	9,37E+00	0,00E+00	5,19E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,62E+01	0,00E+00	0,00E+00	-1,68E+02
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,56E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	2,06E+02	4,77E+01	9,37E+00	0,00E+00	5,18E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,62E+01	0,00E+00	0,00E+00	-1,68E+02
SM	kg	1,76E+00	0,00E+00	5,28E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,39E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m <sup>3</sup>	1,29E-01	1,81E-03	4,23E-03	0,00E+00	5,38E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,90E-04	0,00E+00	0,00E+00	-1,09E-01

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

## Waste production and output flows in case of recycling at End-of-use

### Waste production

Results per functional unit in case of recycling – Elegance and Essence Rigid 30/55																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
Hazardous waste disposed	kg	3,60E-01	3,46E-02	1,39E-02	0,00E+00	7,60E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,89E-02	0,00E+00	0,00E+00	-2,72E-01
Non-hazardous waste disposed	kg	4,68E+00	2,74E+00	3,38E-01	0,00E+00	8,86E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,50E+00	0,00E+00	0,00E+00	-4,00E+00
Radioactive waste disposed	kg	4,51E-04	3,23E-04	3,52E-05	0,00E+00	3,04E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,77E-04	0,00E+00	0,00E+00	-3,88E-04

### Output flows

Results per functional unit in case of recycling – Elegance and Essence Rigid 30/55																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,92E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

### Additional indicator

GWP-fossil	kg CO <sub>2</sub> eq.	9,66E+00	3,15E+00	4,95E-01	0,00E+00	2,53E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,73E+00	0,00E+00	0,00E+00	-7,27E+00
------------	------------------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	-----------

GWP-GHG is the sum of GWP-Fossil and GWP-LULUC indicators



## Additional information – Potential impacts and flows in case of incineration

### Results per functional or declared unit in case of incineration – Elegance and Essence Rigid 30/55

Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
GWP-total	kg CO <sub>2</sub> eq.	0,00E+00	1,46E-01	6,89E+00	2,02E-02	-3,43E+00
GWP-fossil	kg CO <sub>2</sub> eq.	0,00E+00	1,46E-01	6,81E+00	2,02E-02	-3,41E+00
GWP- biogenic	kg CO <sub>2</sub> eq.	0,00E+00	5,84E-05	8,44E-02	1,36E-05	-7,80E-03
GWP- Luluc	kg CO <sub>2</sub> eq.	0,00E+00	5,74E-05	9,02E-04	5,64E-06	-6,55E-03
ODP	kg CFC 11 eq.	0,00E+00	3,38E-08	6,06E-07	8,33E-09	-4,97E-07
AP	mol H <sup>+</sup> eq.	0,00E+00	5,94E-04	1,40E-02	1,92E-04	-1,34E-02
EP-freshwater	kg P eq.	0,00E+00	9,42E-06	8,40E-04	2,08E-06	-1,15E-03
EP-freshwater	kg PO <sub>4</sub> <sup>3-</sup> eq.	0,00E+00	2,89E-05	2,58E-03	6,38E-06	-3,53E-03
EP-marine	kg N eq.	0,00E+00	1,79E-04	4,05E-03	6,64E-05	-2,12E-03
EP-terrestrial	mol N eq.	0,00E+00	1,95E-03	3,74E-02	7,28E-04	-2,13E-02
POCP	kg NMVOC eq.	0,00E+00	5,98E-04	1,04E-02	2,11E-04	-6,42E-03
ADP-minerals&metals*	kg Sb eq.	0,00E+00	5,09E-07	7,13E-05	1,85E-07	-9,01E-06
ADP-fossil*	MJ	0,00E+00	2,21E+00	2,90E+01	5,65E-01	-5,82E+01
WDP	m <sup>3</sup>	0,00E+00	6,41E-03	2,70E+01	2,53E-02	-5,17E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water					

### Results per functional or declared unit in case of incineration – Elegance and Essence Rigid 30/55

Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
PERE	MJ	0,00E+00	3,12E-02	2,63E+00	4,57E-03	-4,21E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	0,00E+00	3,12E-02	2,63E+00	4,57E-03	-4,21E+00
PENRE	MJ	0,00E+00	2,21E+00	2,89E+01	5,65E-01	-5,78E+01
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	0,00E+00	2,21E+00	2,89E+01	5,65E-01	-5,78E+01
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,38E-01
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m <sup>3</sup>	0,00E+00	8,36E-05	8,10E-01	5,98E-04	-2,02E-02
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water					

### Results per functional or declared unit in case of incineration – Elegance and Essence Rigid 30/55

Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
Hazardous waste disposed	kg	0,00E+00	1,60E-03	5,04E+00	3,33E-04	-4,15E-02
Non-hazardous waste disposed	kg	0,00E+00	1,26E-01	1,15E+00	3,84E+00	-7,15E-01
Radioactive waste disposed	kg	0,00E+00	1,50E-05	1,41E-04	3,71E-06	-2,26E-04

### Results per functional or declared unit in case of incineration – Elegance and Essence Rigid 30/55

Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	3,08E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

### Results per functional or declared unit in case of incineration – Elegance and Essence Rigid 30/55

Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq.	0,00E+00	1,46E-01	6,81E+00	2,02E-02	-3,42E+00

## Additional information – Potential impacts and flows in case of landfilling

Results per functional or declared unit in case of landfilling – Elegance and Essence Rigid 30/55						
Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
GWP-total	kg CO <sub>2</sub> eq.	0,00E+00	1,90E-01	0,00E+00	7,88E-01	-2,12E-01
GWP-fossil	kg CO <sub>2</sub> eq.	0,00E+00	1,90E-01	0,00E+00	7,19E-01	-2,07E-01
GWP- biogenic	kg CO <sub>2</sub> eq.	0,00E+00	7,60E-05	0,00E+00	7,01E-02	-5,24E-04
GWP- Luluc	kg CO <sub>2</sub> eq.	0,00E+00	7,47E-05	0,00E+00	1,85E-05	-4,20E-03
ODP	kg CFC 11 eq.	0,00E+00	4,40E-08	0,00E+00	2,73E-08	-8,91E-08
AP	mol H <sup>+</sup> eq.	0,00E+00	7,72E-04	0,00E+00	6,53E-04	-9,67E-04
EP-freshwater	kg P eq	0,00E+00	1,22E-05	0,00E+00	5,91E-06	-6,89E-05
EP-freshwater	kg PO <sub>4</sub> <sup>3-</sup> eq	0,00E+00	3,76E-05	0,00E+00	1,81E-05	-2,11E-04
EP-marine	kg N eq.	0,00E+00	2,32E-04	0,00E+00	3,45E-03	-1,98E-04
EP-terrestrial	mol N eq.	0,00E+00	2,54E-03	0,00E+00	2,63E-03	-1,86E-03
POCP	kg NMVOC eq.	0,00E+00	7,78E-04	0,00E+00	9,05E-04	-6,73E-04
ADP-minerals&metals*	kg Sb eq.	0,00E+00	6,62E-07	0,00E+00	2,48E-07	-5,52E-06
ADP-fossil*	MJ	0,00E+00	2,88E+00	0,00E+00	1,97E+00	-4,91E+00
WDP	m <sup>3</sup>	0,00E+00	8,33E-03	0,00E+00	9,20E-03	-2,80E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources					
Results per functional or declared unit in case of landfilling – Elegance and Essence Rigid 30/55						
Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
PERE	MJ	0,00E+00	4,05E-02	0,00E+00	8,56E-02	-2,68E-01
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	0,00E+00	4,05E-02	0,00E+00	8,56E-02	-2,68E-01
PENRE	MJ	0,00E+00	2,87E+00	0,00E+00	1,97E+00	-4,90E+00
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	0,00E+00	2,87E+00	0,00E+00	1,97E+00	-4,90E+00
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,86E-01
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m <sup>3</sup>	0,00E+00	1,09E-04	0,00E+00	2,38E-03	-3,16E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary					
Results per functional or declared unit in case of landfilling – Elegance and Essence Rigid 30/55						
Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
Hazardous waste disposed	kg	0,00E+00	2,08E-03	0,00E+00	2,27E-03	-7,92E-03
Non-hazardous waste disposed	kg	0,00E+00	1,64E-01	0,00E+00	8,82E+00	-1,16E-01
Radioactive waste disposed	kg	0,00E+00	1,94E-05	0,00E+00	1,27E-05	-1,13E-05
Results per functional or declared unit in case of landfilling – Elegance and Essence Rigid 30/55						
Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Results per functional or declared unit in case of landfilling – Elegance and Essence Rigid 30/55						
Indicator	Unit	C1/1	C2/1	C3/1	C4/1	D/1
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq.	0,00E+00	1,90E-01	0,00E+00	7,19E-01	-2,12E-01

## Information on biogenic carbon content for all groups

Results per functional or declared unit		
BIOGENIC CARBON CONTENT	Unit	QUANTITY
Biogenic carbon content in product	kg C	0.021
Biogenic carbon content in packaging	kg C	<0.012

*Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.*

## References

General Programme Instructions of the International EPD® System. Version 3.01.

PCR 2019:14. Version 1.11 and c-PCR-004 Resilient textile and laminate floor coverings (EN 16810)



## REACTION TO FIRE CLASSIFICATION REPORT IN ACCORDANCE WITH PN-EN 13501-1:2019-02

Contract №: 06079/23/R24NZP

<b>Sponsor:</b>	TARKETT POLSKA Sp. z o.o. 62-322 Orzechowo ul. Miłosławska 13 A Oddział w Jaśle ul. Mickiewicza 108 38-200 Jasło
<b>Prepared by:</b>	Zakład Badań Ogniwych Instytutu Techniki Budowlanej ul. Filtrowa 1 00-611 Warszawa
<b>Product name:</b>	PVC floor panels with name Elegance Rigid 55
<b>Classification report No.:</b>	<b>06079.3/23/R24NZP-ENG</b> (English version of classification 06079.3/23/R24NZP)
<b>Issue number:</b>	1
<b>Date of issue:</b>	31.03.2023

This classification report consists of three pages and may only be used or reproduced in its entirety.

### 1. Introduction

This classification report defines the classification assigned to PVC floor panels with name Elegance Rigid 55 in accordance with the procedures given in PN-EN 13501-1:2019-02.

### 2. Details of classified product

#### 2.1 General

The product is defined as PVC floor panels used in public buildings, residential buildings and light industry buildings.

#### 2.2 Product description

The product, is described below.

PVC floor panels with name Elegance Rigid 55. Total panel thickness: 5,0 mm. Wear layer thickness: 0,30 mm. Surface weight of the panels: 8350 g/m <sup>2</sup> .
--

### 3. Test reports and test results as a basis of the classification

#### 3.1 Test reports

Name of laboratory	Name of sponsor	Test report №	Test method
Fire Testing Laboratory of ITB	TARKETT POLSKA Sp. z o.o.	LZP02-06079/22/R23NZP	PN-EN ISO 11925-2:2020-09
		LZP01-06079/22/R23NZP	PN-EN ISO 9239-1:2010

### 3.2 Test results

Test method	Parameter	Number of tests	Results	
			Continuous parameter – mean (m)	Compliance with parameters
PN-EN ISO 11925-2:2020-09 Exposure 15 s	$F_s \leq 150$ mm	6	(-)	Y
PN-EN ISO 9239-1:2010	Critical heat flux (kW/m <sup>2</sup> )	3	10,6	(-)
	Smoke production (%·min)		107,7	(-)
(-): do not concern Y: Yes N: No				

## 4 Classification and field of application

### 4.1 Reference of classification

This classification has been carried out in accordance with PN-EN 13501-1:2019-02.

### 4.2 Classification

PVC floor panels with name Elegance Rigid 55 are classified:

**B<sub>fl</sub>**

The additional classification in relation to smoke production is:

**s1**

The format of the reaction to fire classification for floorings is:

Fire behaviour		Smoke production	
<b>B<sub>fl</sub></b>	-	<b>s</b>	<b>1</b>

i.e.: **B<sub>fl</sub>-s1**

## Reaction to fire classification: B<sub>fl</sub>-s1

### 4.3 Field of application

This classification is valid for the following product parameters:

- Product described in point 2 this classification report
- Product can be used with on wooden and wood-based substrates and substrates with euroclass A1 and A2.

## 5 Limitation

The classification given above remains valid as long as:

- test method remains unchanged,
- product standard or technical approval remains unchanged,
- constructional or material modifications do not exceed limits of the field of application defined in 4.3.

This classification report has been issued in electronic form, with qualified electronic signatures of persons responsible. A printout of this report is not an original document.

“The classification assigned to the product in this report is appropriate to a declaration of performance (till 1<sup>st</sup> July of 2013 – declaration of conformity) by the manufacturer within the context of system 3 of assessment and verification of constancy of performance (till 1<sup>st</sup> July 2013 – system of conformity) and CE marking according to harmonized technical specification of the product and with Regulation (EU) no. 305/2011 of The European

Parliament and of The Council of 9 March 2011 laying down harmonized conditions for the marketing construction products and repealing Council Directive 89/106/EEC.

The manufacturer has made a declaration, which is held on file. This confirms that the products design requires no specific processes, procedures or stages (e.g. no addition of flame-retardants, limitation of organic content, or addition of fillers) that are aimed at enhancing the fire performance in order to obtain the classification achieved. As a consequence the manufacturer has concluded that system of assessment and verification of constancy of performance 3 is appropriate.

The test laboratory has, therefore, played no part in sampling the product for the test, although it holds appropriate references, supplied by the manufacturer, to provide for traceability of the samples tested.”

This classification document does not represent type approval or certification of the product.

**SIGNED**

Mariusz Żoźnik; Elektronicznie  
Instytut podpisany przez  
Techniki Mariusz Żoźnik; Instytut  
Budowlanej Techniki Budowlanej  
Data: 2023.03.31  
06:49:39 +02'00'

Mariusz Żoźnik

**APPROVED**

  
HEAD  
of Fire Testing Department  
Bartłomiej Papis, PhD Eng.

Bartłomiej Papis; ITB  
2023.04.01 00:07:39+02'00'

dr inż. Bartłomiej K. Papis